

Dual Band Mini Stick Infrared Receiver Instruction Manual

The Dual Band Mini Stick Infrared Receiver receives IR signal from a handheld IR remote control and relays this signal to the audio/video equipment for operation from another room.


FEATURES

- 1. CFL friendly – allows installations in areas with compact fluorescent lighting. Works in most lighting environments.
- 2. Blue IR confirmation LED.
- 3. Wide band IR receives IR from many types of remotes.
- 4. Self-adhesive tape for quick and easy fixing on any flat surface.
- 5. 3 meters cable with 3.5mm stereo mini-plug.

SPECIFICATIONS

Receive frequency range.....	34 KHz to 60 KHz
Transmit frequencies.....	38 KHz & 56 KHz
Range.....	40ft. @ 38 KHz
.....	25ft. @ 56 KHz
Power.....	12VDC, 30mA max.
Dimensions.....	45L x 14W x 13H mm
Cord length.....	10ft (3m)
Connector type.....	1/8" (3.5mm) TRS mini plug
Weight.....	28 g

WIRE CONNECTIONS

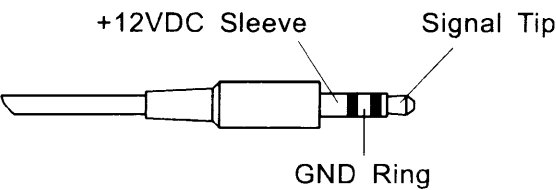

Conductors on 1/8" (3.5mm) stereo mini-plug

INSTALLATION

The IR Receiver is used in the typical installations: Connected directly to an IR connector block or IR hub. Make sure mounting surface must be clean and dry for fixed well.