


GENERAL SCHEMATICS


3" FASCIA

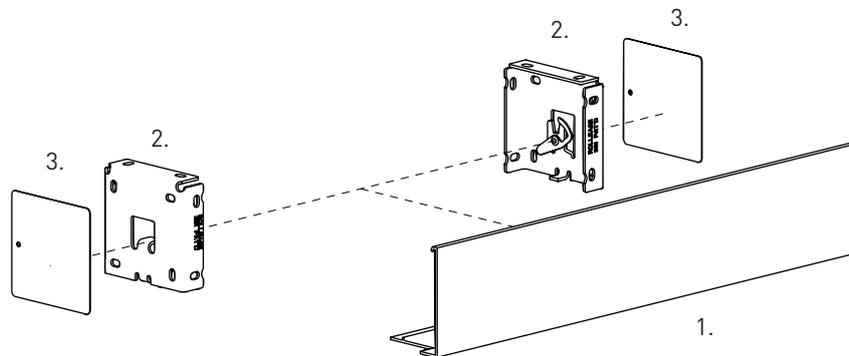

SYSTEM INDEX:

1. 3" R-Series Square Fascia
2. 3" R-Series Fascia Bracket Set
3. 3" R-Series Fascia Face Plate Pair

4" FASCIA

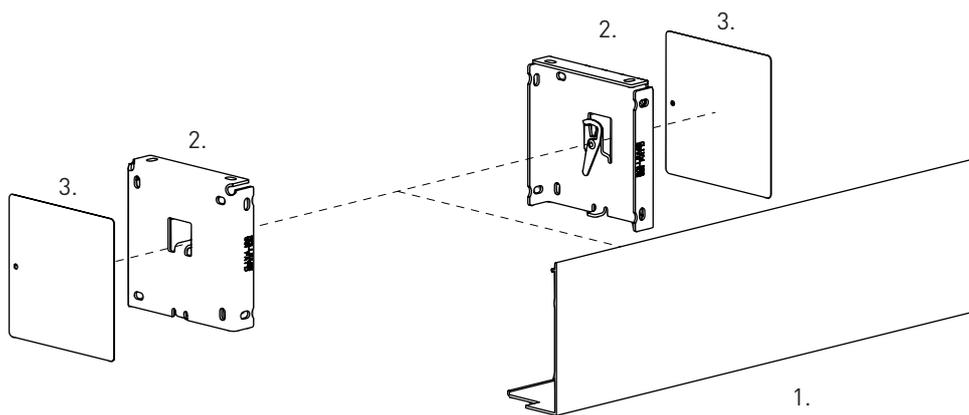


SYSTEM INDEX:


1. 4" R-Series Square Fascia
2. 4" R-Series Fascia Bracket Set
3. 4" R-Series Fascia Face Plate Pair

ARCHITECTURAL VIEWS

3" FASCIA

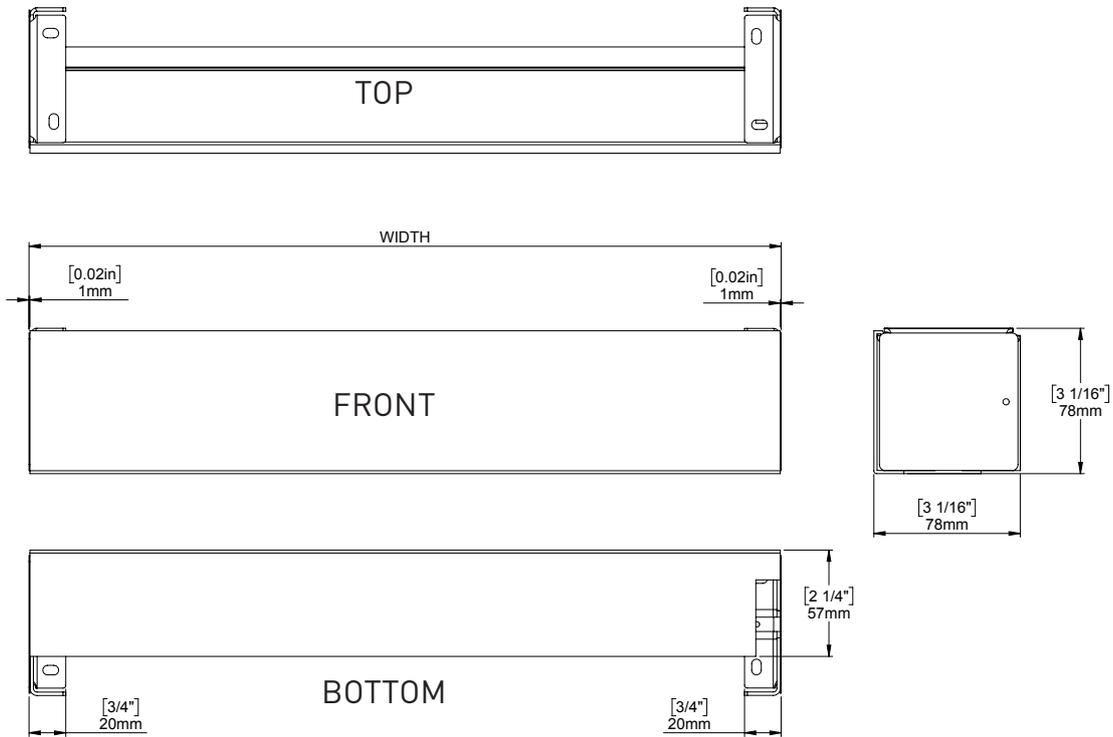


4" FASCIA

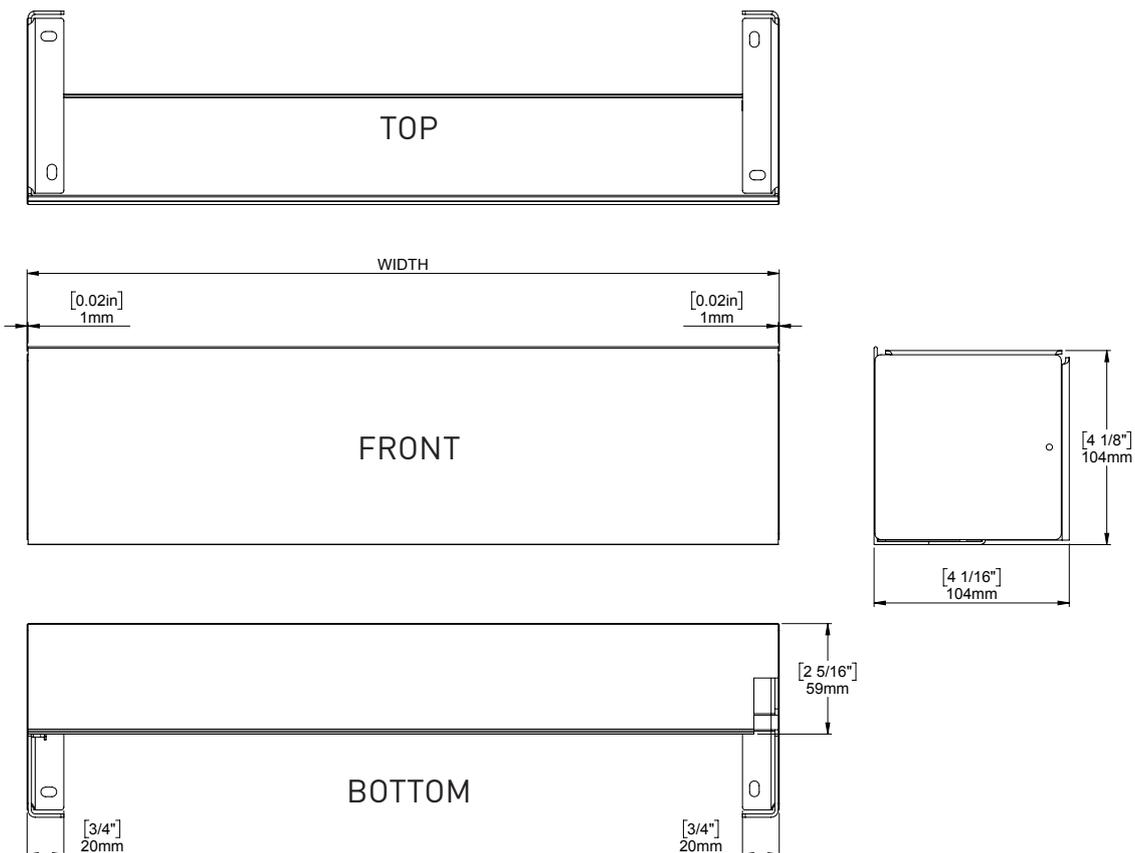


MAXIMUM ROLL DIAMETERS

3" FASCIA

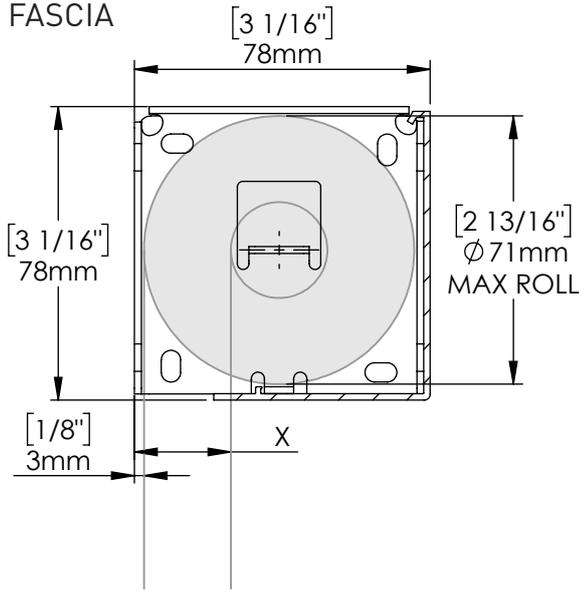



4" FASCIA

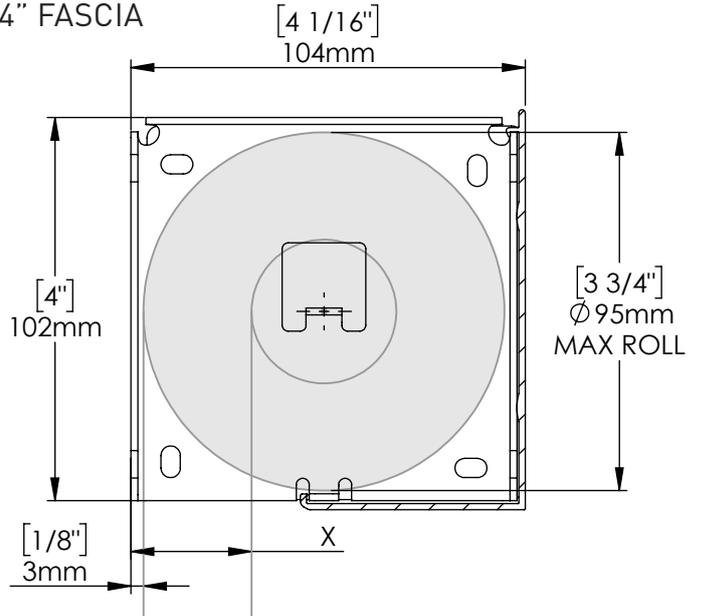

System	Tube	Max Distance from back of bracket X
3"	1"	25mm [1"]
	1-1/8"	24mm [15/16"]
	1-1/4"	22mm [7/8"]
	1-1/2"	19mm [3/4"]


System	Tube	Max Distance from back of bracket X
4"	1-1/2"	32mm [1-1/4"]
	2"	26mm [1"]
	2-1/2"	19mm [3/4"]
	3-1/4"	9mm [3/8"]

FASCIA DEDUCTIONS + NOTCH

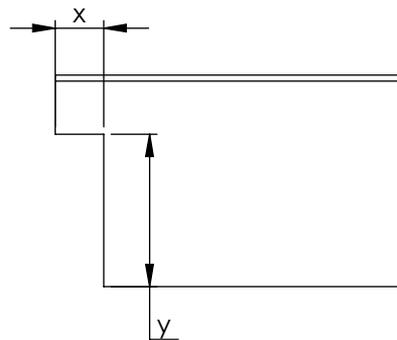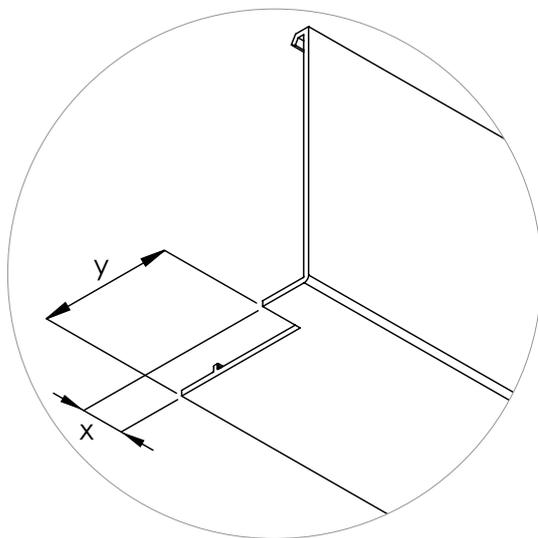

CONFIGURATION	NOTCH DIMENSIONS		FASCIA DEDUCTIONS	
	x	y	With Bracket Covers	Without Bracket Covers
3" FASCIA PANEL FOR R8 CLUTCH	13mm [1/2"]	41mm [1 - 5/8"]	Shade Width - 2mm [0.08"]	Shade Width
3" FASCIA PANEL FOR R16 CLUTCH				
4" FASCIA PANEL FOR R16 CLUTCH	14mm [9/16"]	51mm [2"]	Shade Width - 2mm [0.08"]	Shade Width
4" FASCIA PANEL FOR R24 CLUTCH				
4" FASCIA PANEL FOR G200 CLUTCH	13mm [1/2"]	41mm [1 - 5/8"]	Shade Width - 2mm [0.08"]	Shade Width
4" FASCIA PANEL FOR G400 CLUTCH	14mm [9/16"]	51mm [2"]		

TUBE DEDUCTIONS + LIGHT GAP

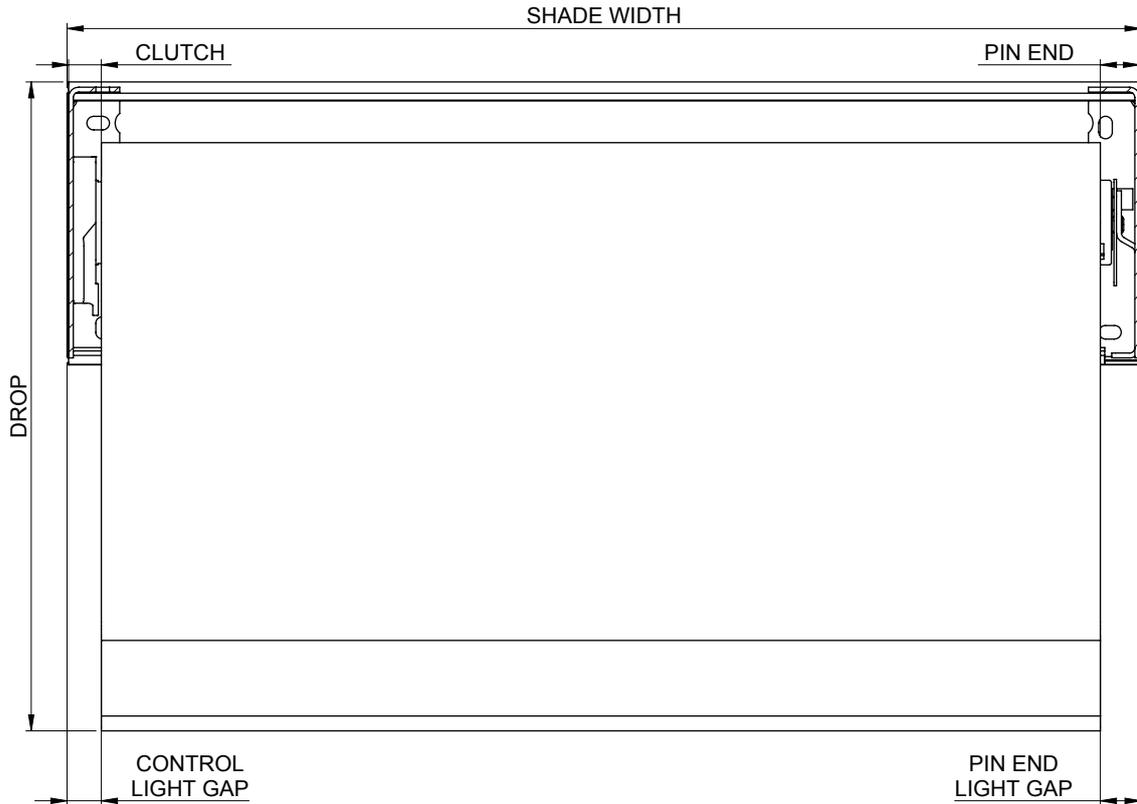


System	Tube	Clutch	Brackets	Pin End	Adapter	Tube Deduction		Light Gap with Bracket Covers*	
						With Bracket Covers	Without Bracket Covers	Control Side	Pin End Side
3"	1"	R8	RB362RTNxx	REP02xx	-	29mm [1.15"]	27mm [1.07"]	14mm [0.56"]	15mm [0.59"]
	1-1/8"	R8		REP01xx					
	1-1/4"	R8		REP03xx					
	1-1/2"	R8		REP53xx					
4"	1-1/2"	R16	RB561RTNxx	REP53xx	-	32mm [1.24"]	30mm [1.16"]	17mm [0.65"]	15mm [0.59"]
	1-1/2"	R24		REP53xx	-	32mm [1.24"]	30mm [1.16"]	17mm [0.65"]	15mm [0.59"]
	2"	R24	RB581RTNxx	REP53xx	RA2xx	32mm [1.24"]	30mm [1.16"]	17mm [0.65"]	15mm [0.59"]
	2"	G200		REP53xxSS	RA2xx	33mm [1.28"]	31mm [1.20"]	18mm [0.69"]	15mm [0.59"]
	2-1/2"	G200		REP53xxSS	RA25xx	34mm [1.34"]	32mm [1.26"]	18mm [0.71"]	16mm [0.63"]
	1-1/2"	G400		REP53xxSS	-	32mm [1.24"]	30mm [1.16"]	17mm [0.65"]	15mm [0.59"]
	2"	G400		REP53xxSS	RA2xx	32mm [1.24"]	30mm [1.16"]	17mm [0.65"]	15mm [0.59"]
	2-1/2"	G400		REP53xxSS	RA25xx	33mm [1.28"]	31mm [1.20"]	18mm [0.69"]	15mm [0.59"]
	3-1/4"	G400		REP53xxSS	RA25xx	33mm [1.28"]	31mm [1.20"]	18mm [0.69"]	15mm [0.59"]


NOTES *Deduct 1mm [0.04"] from each side to for Light Gap "without bracket covers" value

3" FASCIA - R-SERIES


Wall Mount

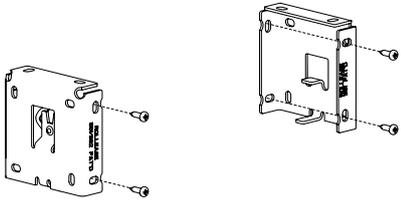


Ceiling Mount

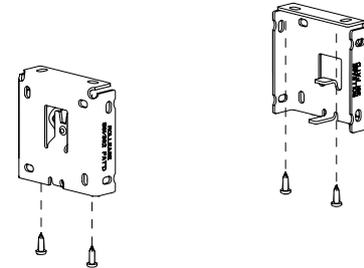


Inside Mount

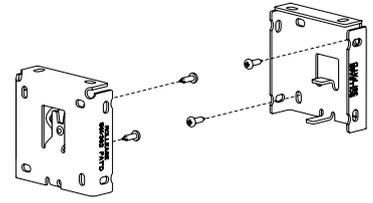


Attach Clutch, swing assembly to bracket




Rotate Hook over pin end

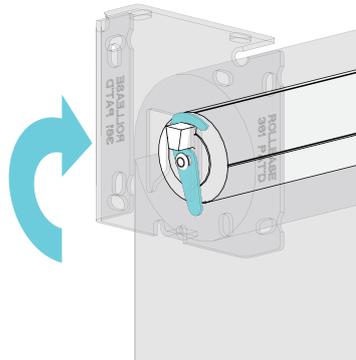

Attach Fascia Cover. Swing from top




Attach Face Plates

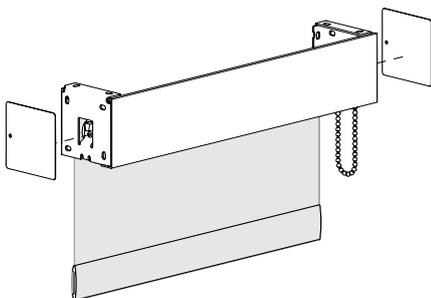


4" FASCIA - R-SERIES


Wall Mount

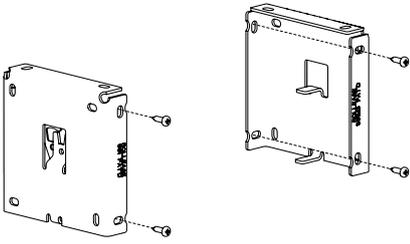


Ceiling Mount

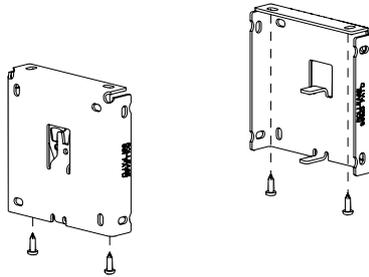


Inside Mount

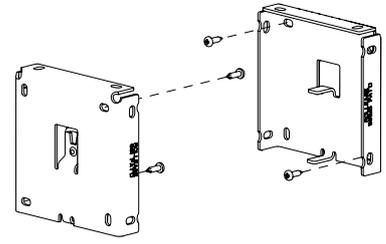


Attach Clutch, swing assembly to bracket



Rotate Hook over pin end

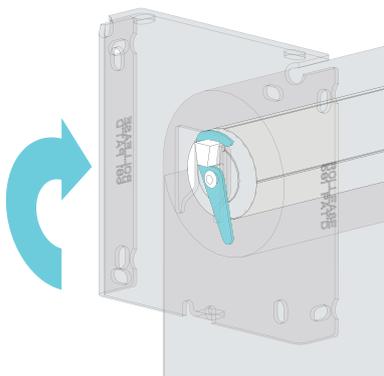

Attach Fascia Cover. Swing from top

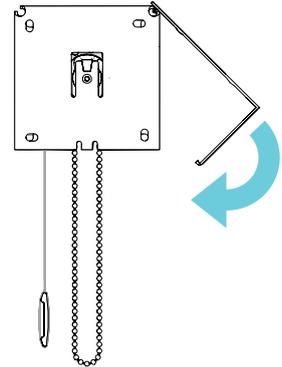

Attach Face Plates

